

(12) INTERNATIONAL REQUEST PUBLISHED UNDER THE COOPERATION TREATY  
FOR PATENT MATTERS (PCT)

(19) World Organization of Intellectual  
Property International Office  
(43) International publication date  
February 19, 2004 (2/19/04)



10/523554

(10) International publication number  
WO 2004/015213 A2

(51) International patent classification<sup>7</sup>: E03F 5/06

(74) Attorney: THINAT, Michel; Cabinet Weinstein. 56A. rue  
du Faubourg Saint Honoré. F-75008 Paris (FR).

(21) International application no.:

PCT/FR2003/002391

(22) International submission date: July 29, 2003 (7/29/03)

(25) Application language: French

(26) Publication language: French

(30) Priority data:  
02/09895 August 2, 2002 (8/2/02) FR

(71) Applicant (for all designated countries except US):  
NORINCO [FR/FR]; Z.I. de Marivaux. F-60149 Saint  
Crepin Ibouvillers (FR).

(72) Inventor; and


(75) Inventor/Applicant (US only): MONNERET, Jean-  
Jacques [FR/FR]; 1. impasse des Soeurs, F-69100  
Villeurbanne (FR).

(81) Designated countries (national): AE. AG, AL. AM. AT.  
AU. AZ. BA. BB. BG. BR. BY. BZ. CA. CH. CN. CO. CR.  
CU. CZ. DE. DK. DM. DZ. EC. EE. ES. FI. GB. GD. GE.  
GH. GM. HR. HU. ID. IL. IN. IS. JP. KE. KG. KP. KR. KZ.  
LC. LK. LR. LS. LT. LU. LV. MA. MD. MG. MK. MN.  
MW. MX. MZ. NO. NZ. OM. PG. PH. PL. PT. RO. RU.  
SC. SD. SE. SG. SK. SL. SY. TJ. TM. TN. TR. TT. TZ.  
UA. UG. US. UZ. VC. VN. YU. ZA. ZM. ZW.

(84) Designated countries (regional): ARIPO patent (GH.  
GM. KE. LS. MW. MZ. SD. SL. SZ. TZ. UG. ZM. ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU. TJ. TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE. DK. EE,  
ES, H. FR. GB, GR, HU, IE, IT, LU, MC, NE, PT. RO. SE,  
SI, SK. TR), OAPI patent (BF, BJ. CE CG, CI, CM. GA.  
ON. GQ. GW, ML, MR, NE, SN, TD, TG).

[Continued on following page]

(54) Title: GRATE FOR CLOSING A DRAIN AND SIMILAR

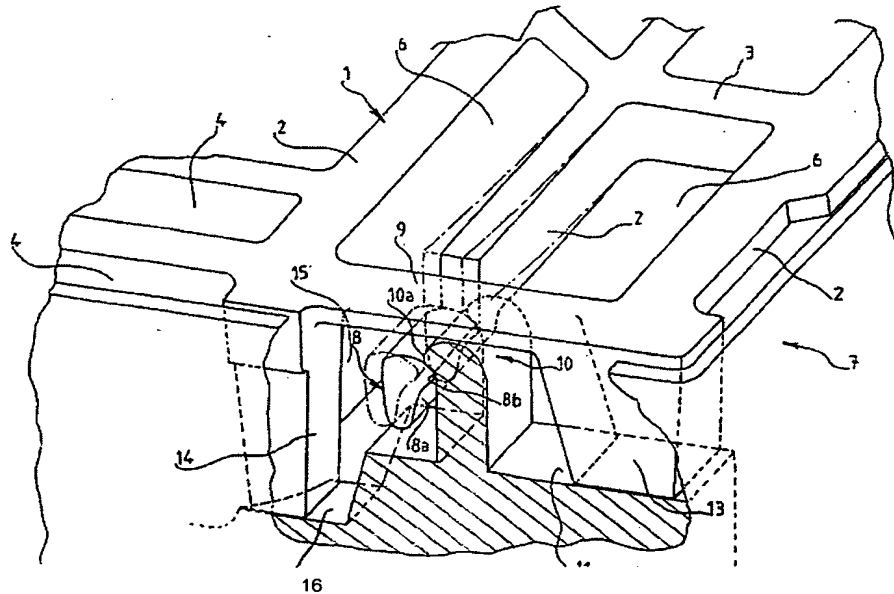

(57) Abstract: The invention relates to a grate for closing a drain and similar. The inventive grate comprises an internal elastically deformable grid (2) provided with a locking pin (8) arranged on the free end thereof. Said locking pin is used for connecting the deformable grid to a frame (7) and is arranged under the external solid edge (9) of the grid in such a way that it is invisible from outside when it is incorporated into the frame (7). Said invention is used for a road network.

[Cont. on following page!]